


Acoustic Timber Wall and Ceiling Cladding

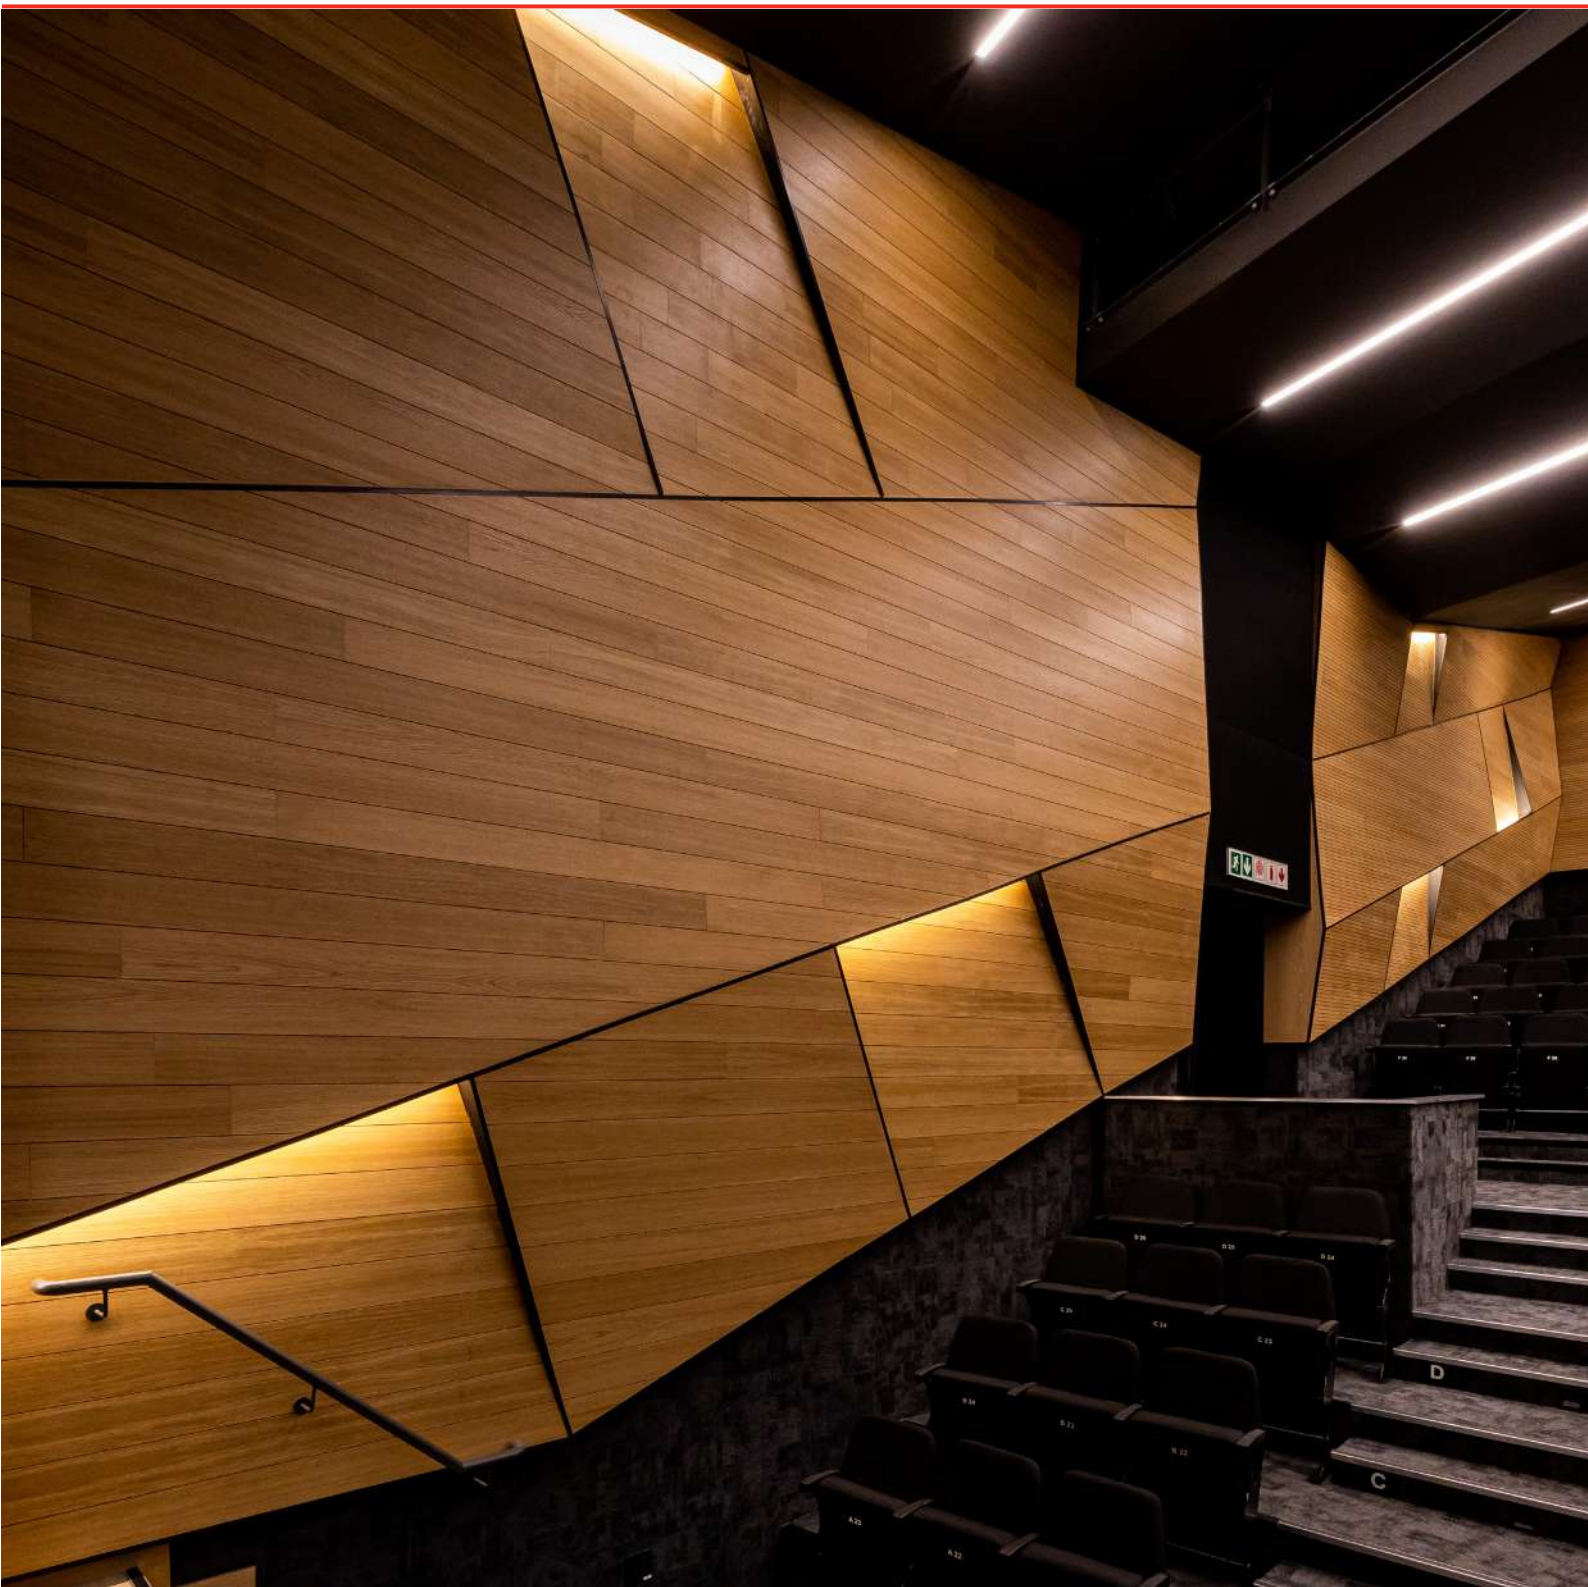

Curro High School - Durbanville, Cape Town

OWA

ideatec 
advanced acoustic solutions




UCT Chris Hani Auditorium - Cape Town

Ideacoustic Standard 32	4
Ideacoustic High 16	6
Ideacoustic Finishes	8
Ideacoustic Product Info	9
Idealux LT	10
Idealux FL	12
Ideawood Slats	14
Contact Us	16



Ideacoustic's Standard 32 is an aesthetically pleasing product, intended for places requiring an enhanced acoustic ambience, whether it be big spaces like theatres and auditoriums, or smaller ones such as restaurants, shops and meeting areas.

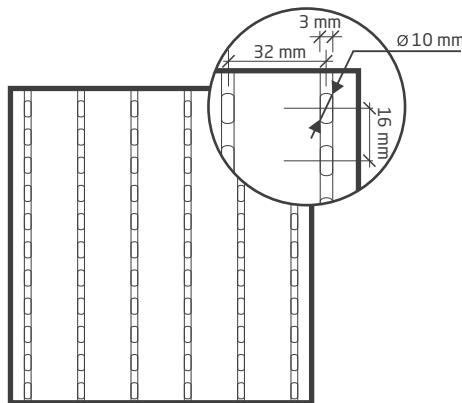

- Visible face: **grooves**.
- Reverse: **perforations**.

Studied data

Dimensions

2430 x 160 x 16mm

Grooves

3 mm

Diameter

10 mm

Perforation-available

2 mm, 3 mm and 4 mm



Noise reduction coefficient



0.65 with 200mm Cavity
+ Acoustic Insulation



0.65 with 50mm Cavity
+ Acoustic Insulation



Direct fix with Acoustic
Insulation - NRC on
application.




- Installation details available upon request





Ideacoustic's High 16 offers acoustic solutions for the most demanding spaces. Its acoustic performance within a wide range of frequencies makes it a reference product for the sector's professionals.

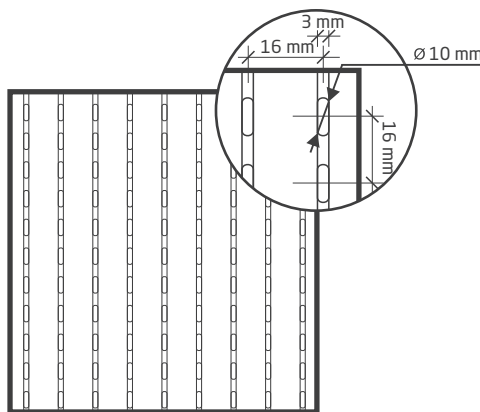

- Visible face: **grooves.**
- Reverse: **perforations.**

Studied data

Dimensions

2430 x 160 x 16mm

Grooves

3 mm

Diameter

10 mm

Perforation-available

2 mm, 3 mm and 4 mm



Imibala Ballet School – Cape Town

- Installation details available upon request

Noise reduction coefficient



0.75 with 200mm Cavity
+ Acoustic Insulation



0.80 with 50mm Cavity
+ Acoustic insulation



Direct fix with Acoustic
Insulation - NRC on
application.






Standard melamines




Maple



Cherry




Coral



Silver




Pear



Wengue



Beech



Oak




White


Standard wood veneer panels




Maple



Cherry



Oak



Wengue



Beech

* More finishes available upon request



Laquered panels

We have the necessary ability, technology and tools to supply our panels in any finish of PANTONE, RAL or NCS




DSV Logistics - Johannesburg

Absorbent layer: Black acoustic fabric attached to the rear

Dimensions: | **Ceiling panelling:** 2430 x 160 x 16 mm

Wall panelling: 2430 x 160 x 16 mm


Tolerance: | **Width:** $\pm 1,5$ mm // **Length:** $\pm 1,5$ mm.

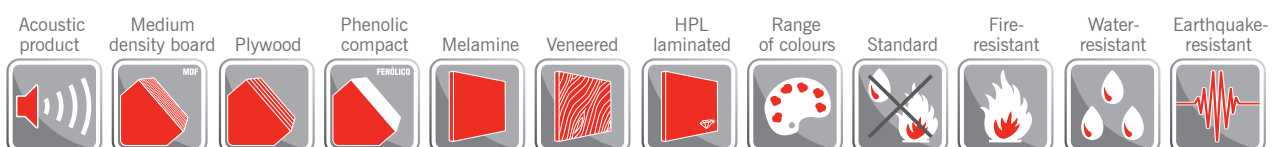

- Installation details available upon request



Idealux LT, the solid wood panel with the best features on the market, completely removable and accessible modules, designed for easy and simple installation.

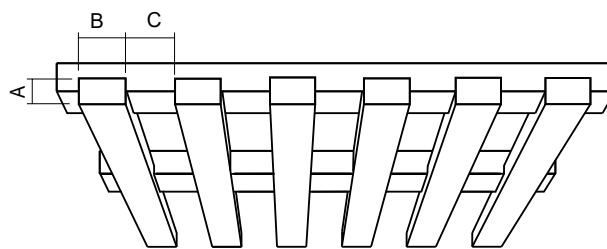

- Solid wood slats attached through
MDF crossbars

Studied data

Dimensions

1980 x 600mm

Slats


22 x 45mm

Weight

7.73 Kg

Density

470 Kg/m³ Wall

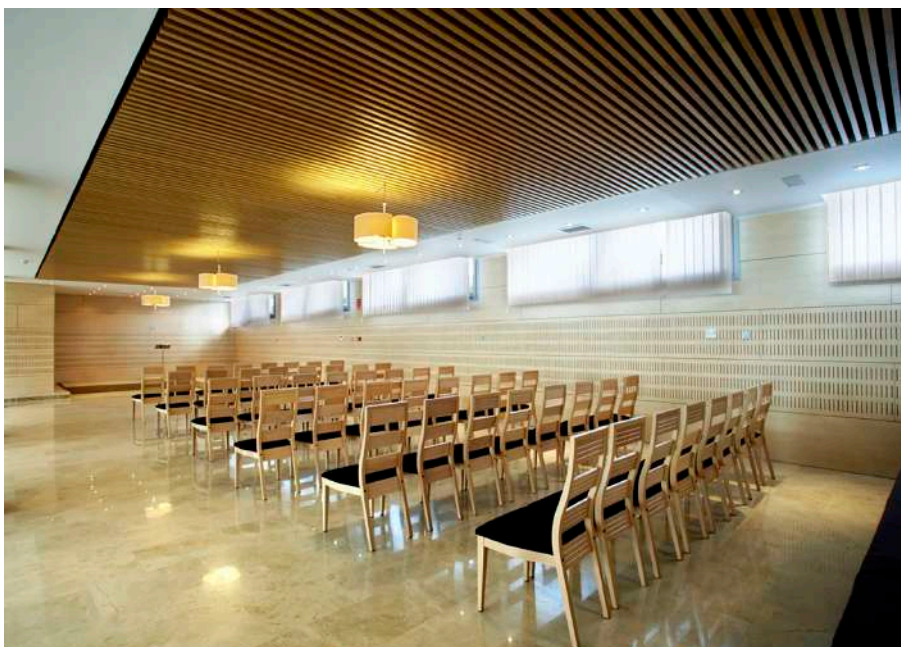

- Installation details available upon request

Noise reduction coefficient



NRC = 0,90

Test Conditions


5 cm total plenum depth.
+ 4 cm of acoustic insulation







Idealux FL, where the style of natural wood meets the acoustic performance of our polyester fiber panel. A panel with high acoustic performance, ideal for ceiling and wall cladding.

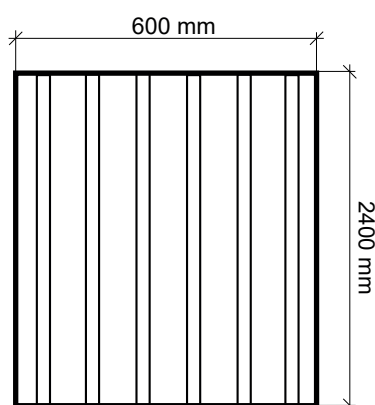

- Polyester fiber core
and finished in natural wood

Studied data

Slats
13x27mm with
a 13mm gap
Density
470 Kg/m³ Wall

Dimensions
2400 x 600mm
Separation
68mm
Batten Height
22/42mm
Application
Wall/Ceiling



Noise reduction coefficient



NRC = 0,90

Test Conditions

200mm Plenum Depth
+40mm Acoustic Insulation




- Installation details available upon request





Ideawood Slats, the elegance of natural wood in a format that will never be outdated. Infinite installation possibilities both on the ceiling and on the wall.

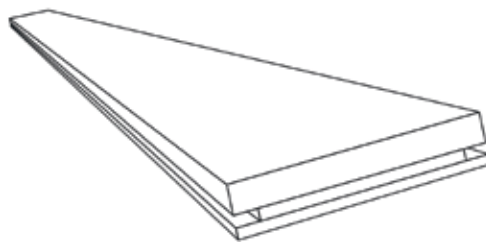

- Solid wood modules

Studied data

Dimensions

Measures on request

Thickenss

22mm

Weight

2,70kg

Density

490 Kg/m³ Wall



- Installation details available upon request

Noise reduction coefficient




NRC= 0,60

Test Conditions

5 cm total plenum depth.
+ 4 cm of acoustic insulation





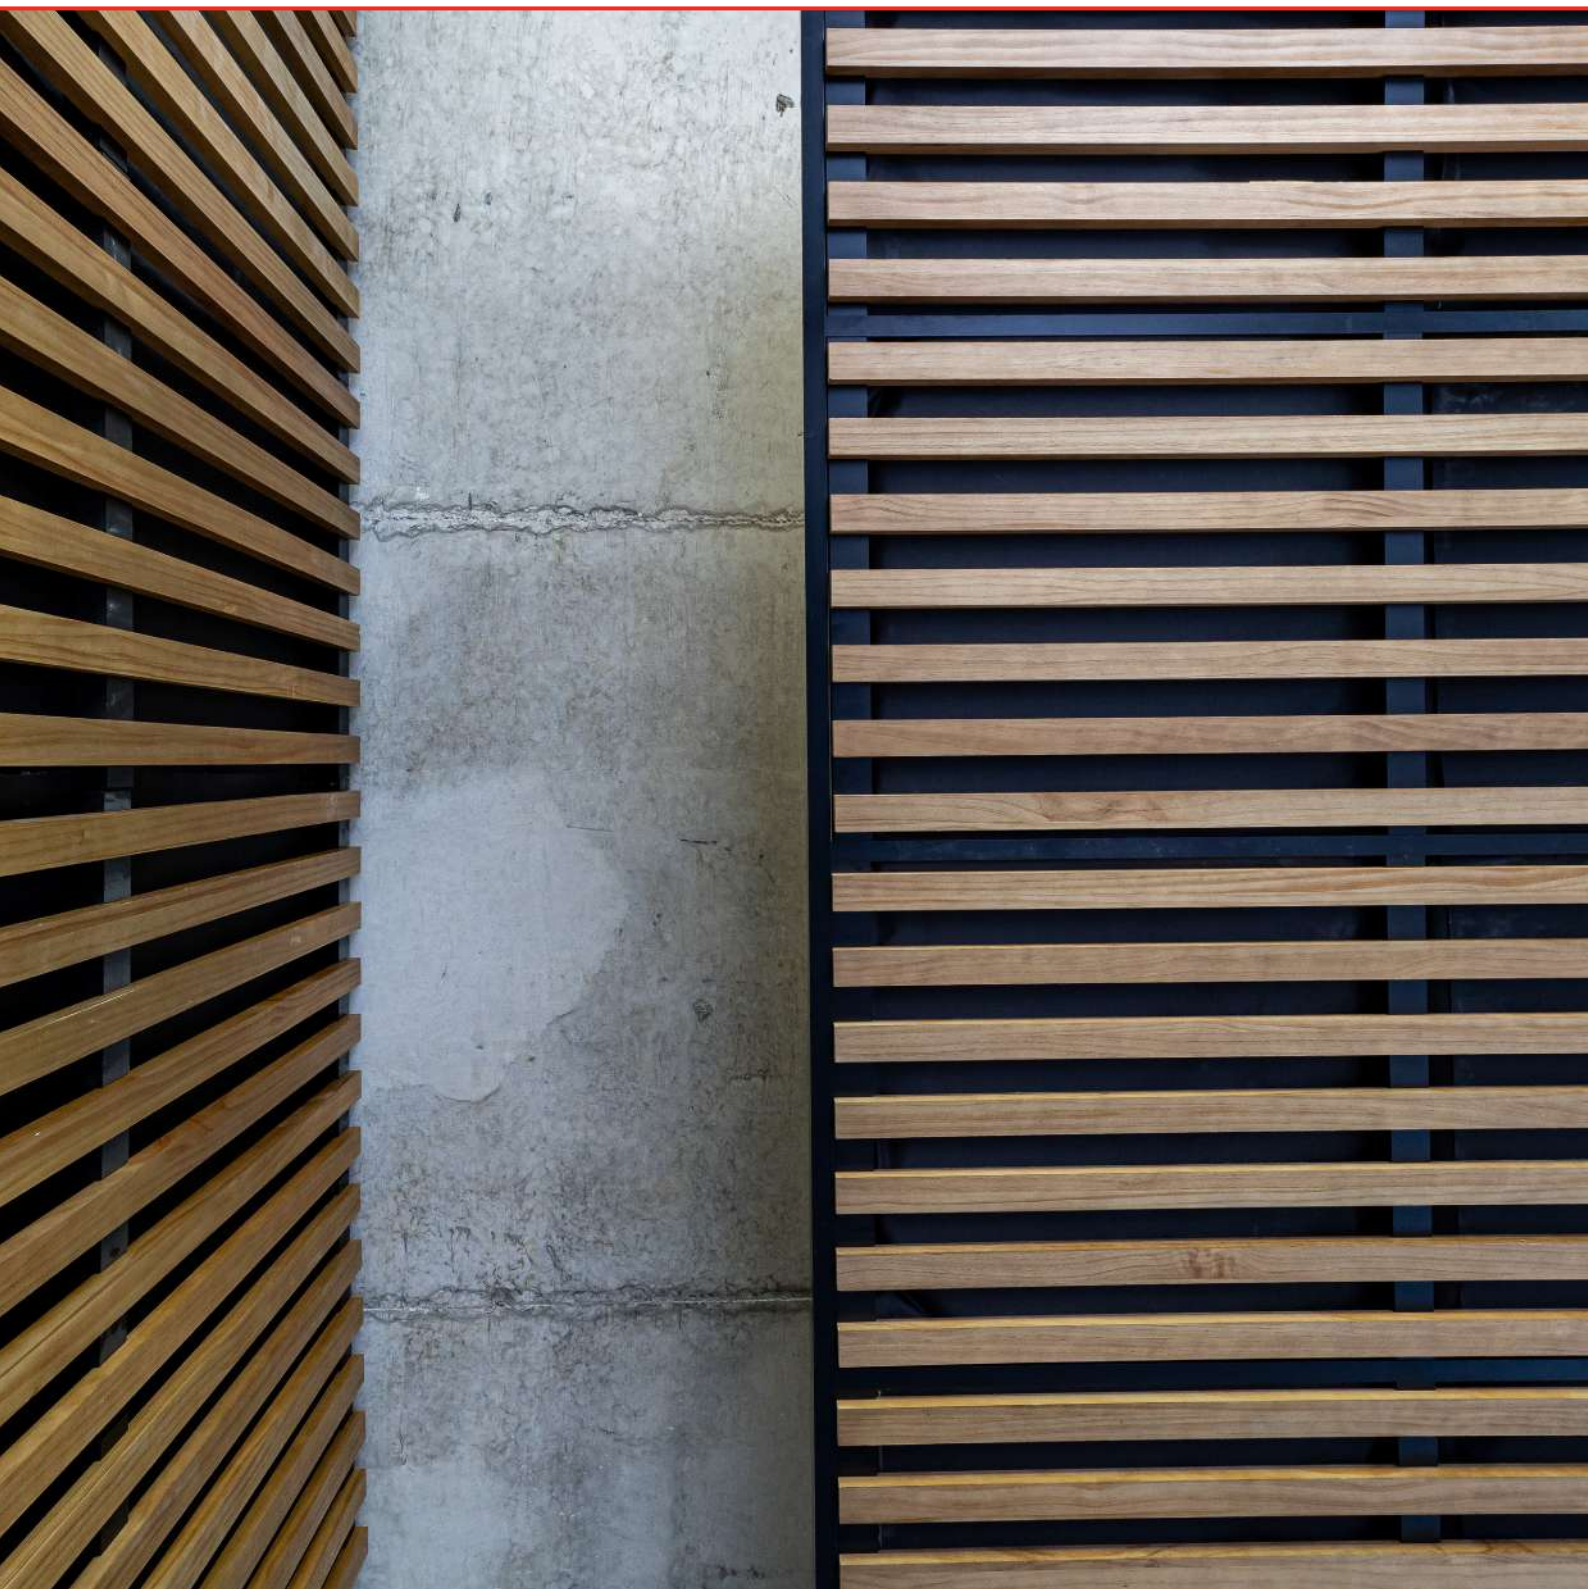

Johannesburg

OWA Southern Africa
19 Fourth Street, Wynberg 2090
tel 011 786 5762 | yvette@owa.co.za
www.owa.co.za

Cape Town

OWA Ceiling Systems Cape
76 Gunners Circle, Epping 1, 7460
tel 021 531 7511 | info@owacape.co.za
www.owa.co.za

Durban

OWA Southern Africa
22 Brickworks Way, Briardene, 4051
tel 031 564 8726 | veronika@owa.co.za
www.owa.co.za